



N 913 Or
Wax/Resin

Colored Thermal transfer ribbons

N 913 Or

is a wax/resin grade quality with a good mechanical resistance for label printers and direct printing systems with near-edge printing head : Avery, TEC, Easyprint, Smart Date, Allen etc.



Flat-head

PROPERTIES

- Near-edge wax resin with a good smear and scratch resistance
- All-round quality
- Good contrast

APPLICATION


- Product labelling for inside and outside areas
- Logistic labels
- Suitable for printing speeds up to 200mm/s

RECOMMENDED LABEL STOCK

- Vellum, matt and glossy coated papers, cast-coated paper like Chromolux
- Matt or glossy cardboard materials
- Synthetic films such as PE, PET, PP, PVC, with a matt or glossy surface, corona treatment or suitable top coat



Near-edge

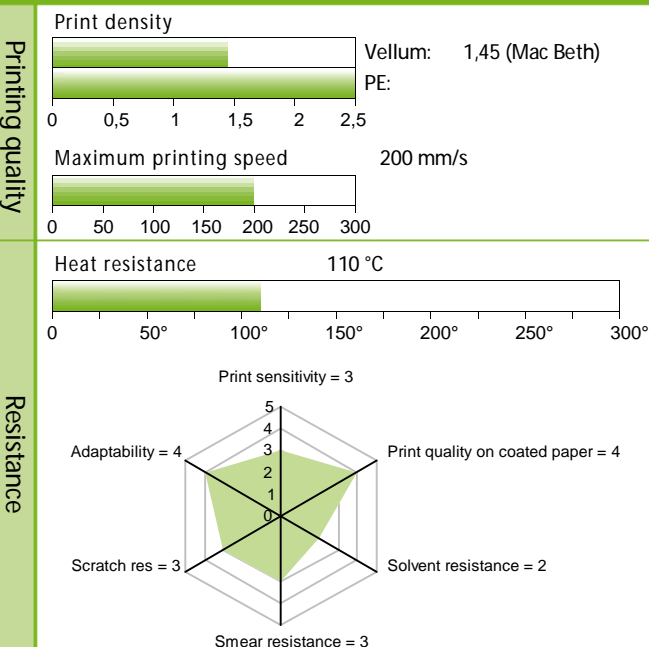

Ribbon specification

Quality level:	Wax/Resin	Near-edge
Basefilm:	PET 4,5 µm	
Ribbon:	7,5 µm ±1,0 µm	
Colour:	Orange 021C	
Optical density ribbon:	1,22 (Mac Beth)	
Ink melting point:	84 °C	



Direct printing

Wax

Wax+

Wax/Resin

Resin

Wax

Wax/Resin

Resin

Wax

Wax/Resin

Resin

CERTIFICATIONS:

The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

SHELF-LIFE AND STORAGE CONDITIONS:

In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:

Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

REACH:

All substances and preparations that are used for the production of this quality have been pre-registered.

CALOR | RTT

