



Colored Thermal transfer ribbons

N 955 Ga

is a resin quality in grey. The ink guarantees a high sensibility and flexibility and is compatible with all near-edge printers like Avery, Toshiba-TEC, Valentin etc.



Flat-head

PROPERTIES

- High opacity
- High resolution, good printing of small characters and fine lines
- High sensitivity for increased print-head life
- Very flexible, good results on various label stock
- Customer specific colours can be developed if a minimum quantity of 10.000 m² is reached

APPLICATIONS


- Highlighting of important information
- Suitable for high quality labels in corporate colour

RECOMMENDED LABEL STOCK

- Gloss-coated paper, cast-coated paper like Chromolux
- Synthetic films like PE, PP, PVC with matt or gloss surfaces, corona-treated or with suitable top-coats



Near-edge

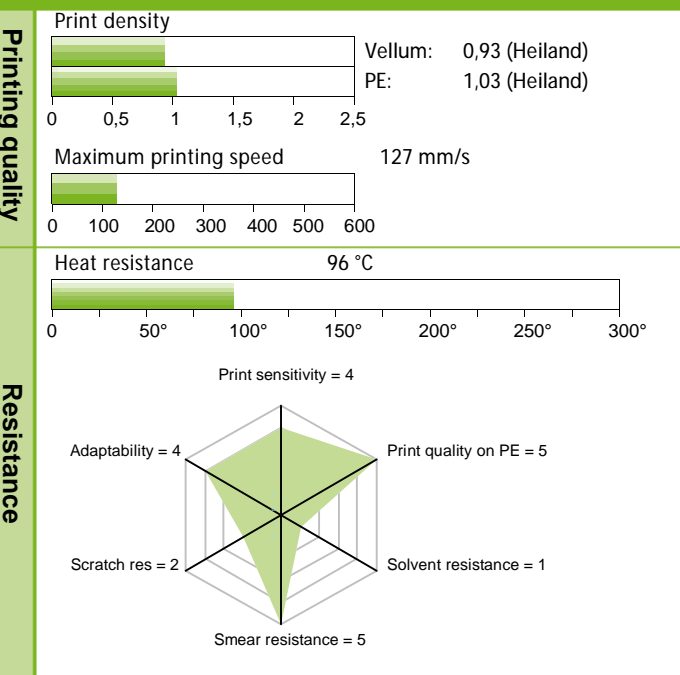

Ribbon specification

Quality level:	Resin	Near-edge
Basefilm:	PET 4,5 µm	
Ribbon:	6,7 µm	
Colour:	425C	
Optical density ribbon:	0,40 (Heiland)	
Ink melting point:	80 °C	



Direct printing

CERTIFICATIONS:

The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

REACH:

All substances and preparations that are used for the production of this quality have been pre-registered.

SHELF-LIFE AND STORAGE CONDITIONS:

In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 °C, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:

Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

