

Black is beautiful

Black Thermal transfer ribbons



T 150 Sw

Wax

T 150 Sw

is a standard wax grade quality with a higher resistance. It has a broad range of application on all flat-head printers, e.g.: CAB, Datamax, Eltron, Intermec, Sato, Valentin, Zebra, etc.



Flat-head

PROPERTIES

- Good print image with a good contrast
- Good smear and scratch resistance

APPLICATION



- Product labelling, shipping and logistic labels
- Prints labels with good durability
- Suitable for high printing speed

RECOMMENDED LABEL STOCK

- Vellum, matte- and gloss-coated paper, cast-coated paper like Chromolux
- Cardboard material
- PE, PP, and other synthetic films



Near-edge

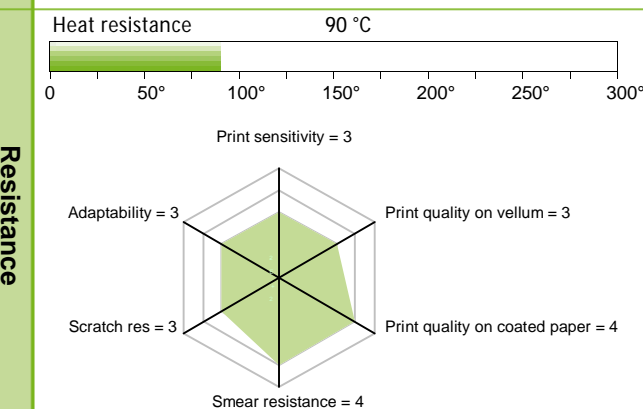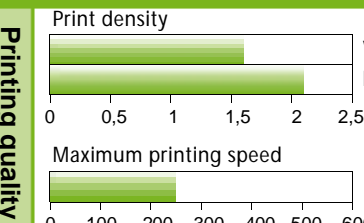

Ribbon specification

| | | |
|-------------------------|----------------|-----------|
| Quality level: | Wax | Flat-head |
| Basefilm: | PET 4,5 µm | |
| Ribbon: | 7,1 µm ±0,4 µm | |
| Colour: | Process Black | |
| Optical density ribbon: | 1,50 (Heiland) | |
| Ink melting point: | 67 °C | |



Direct printing

Wax

Wax+

Wax/Resin

Resin

Wax

Wax/Resin

Resin

Wax

Wax/Resin

Resin

CERTIFICATIONS:
The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

REACH:
All substances and preparations that are used for the production of this quality have been pre-registered.

SHELF-LIFE AND STORAGE CONDITIONS:
In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:
Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

CALOR | RTT

