



T 426 Go

Wax/Resin

Colored Thermal transfer ribbons

T 426 Go

is a wax/resin quality in matt gold. The pigment-based ink guarantees a good mechanical resistance and compatibility to all labelprinters equipped with flat heads, like CAB, Datamax, Eltron, Intermec, Sato, Valentin, Zebra, etc.



Flat-head

PROPERTIES

- High resolution
- Very high smear and scratch resistance due to high resin proportion
- Suitable for synthetic films and smooth surfaces

APPLICATION


- High quality product identification for liqueurs, perfums etc.
- Printing on coated fabrics and films for flower and funeral decoration

RECOMMENDED LABEL STOCK

- Matt- and gloss-coated paper, cast-coated paper like Chromolux
- Brilliant results on labels preprinted with dark colours
- Synthetic films like PE, PP, PVC with matt or gloss surfaces, corona-treated or with suitable top-coats



Near-edge

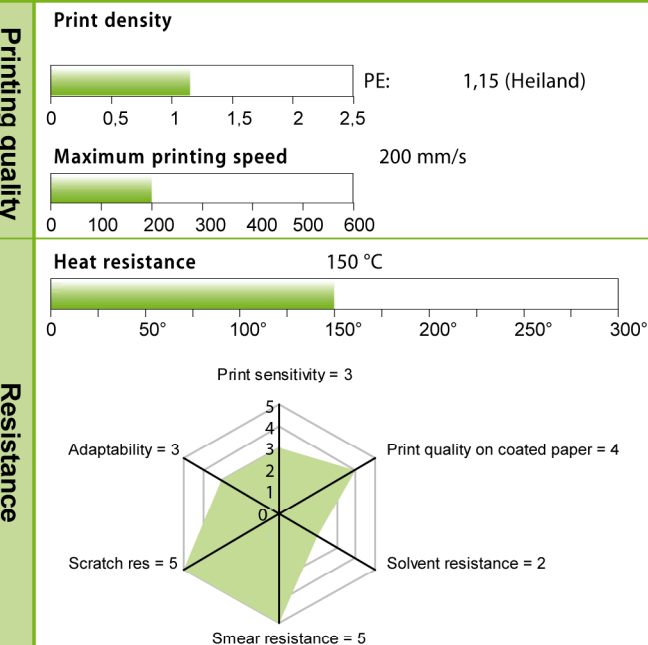

Ribbon specification

Quality level:	Wax/Resin	Flat-head
Basefilm:	PET 4,5 µm	
Ribbon:	7,5 µm ±1,0 µm	
Colour:	872 C	
Optical density ribbon:	0,80 (Heiland)	
Ink melting point:	100 °C	



Direct printing

Wax

Wax+

Wax/Resin

Resin

Wax

Wax/Resin

Resin

Wax

Wax/Resin

Resin

CERTIFICATIONS:

The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

SHELF-LIFE AND STORAGE CONDITIONS:

In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:

Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

REACH:

All substances and preparations that are used for the production of this quality have been pre-registered.

CALOR GmbH, 08.04.2016

CALOR | RTT

