



T 432 Ge

Wax/Resin

Colored Thermal transfer ribbons

T 432 Ge

is a yellow wax-resin quality for universal use on all flat-head printers, e. g. from CAB, Datamax, Eltron, Intermec, Sato, Valentin, Zebra, etc.



Flat-head

Wax

Wax+

Wax/Resin

Resin

PROPERTIES

- High opacity, vibrant colour
- High resolution even of small characters and fine lines
- Good smear resistance
- Very sensitive and thus print-head friendly
- High flexibility, very good results on all kinds of label stock

APPLICATIONS

- Highlighting important information in colour
- Product identification and differentiation by means of colours
- Suitable for high quality labels in corporate colour

RECOMMENDED LABEL STOCK

- Vellum, matt-, gloss- and cast-coated papers
- Cardboard materials
- PE, PP, PS, PET and other synthetic films




Near-edge

Wax

Wax/Resin

Resin

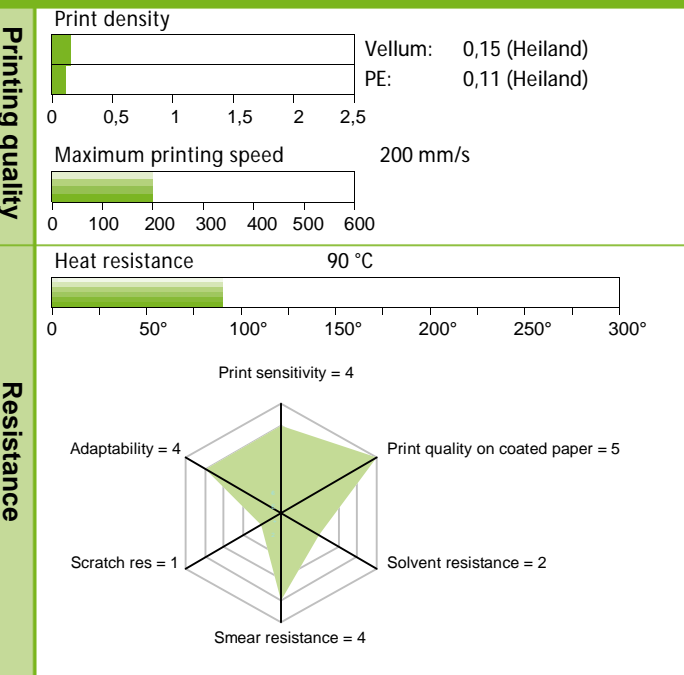

Ribbon specification

Quality level:	Wax/Resin	Flat-head
Basefilm:	PET 4,5 µm	
Ribbon:	7,5 µm ±0,5 µm	
Colour:	109 C	
Optical density ribbon:	0,09 (Heiland)	
Ink melting point:	90 °C	



Direct printing

Wax

Wax/Resin

Resin

CERTIFICATIONS:

The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

REACH:

All substances and preparations that are used for the production of this quality have been pre-registered.

SHELF-LIFE AND STORAGE CONDITIONS:

In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:

Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

CALOR | RTT

