



T 562 BI

Resin

Colored Thermal transfer ribbons

T 562 BI

is a resin quality with a good resistance against solvents and a good smear resistance. This ribbon is only suitable for printing on PVC cards.



Flat-head

Max

Max+

Max/Resin

Resin

PROPERTIES

- High pigment density and very clear printing
- Good resolution, even for small characters and fine lines
- Doesn't print on paper

APPLICATION

- Very good monochrome print on PVC cards

RECOMMENDED LABEL STOCK

- PVC cards




Near-edge

Max

Max/Resin

Resin

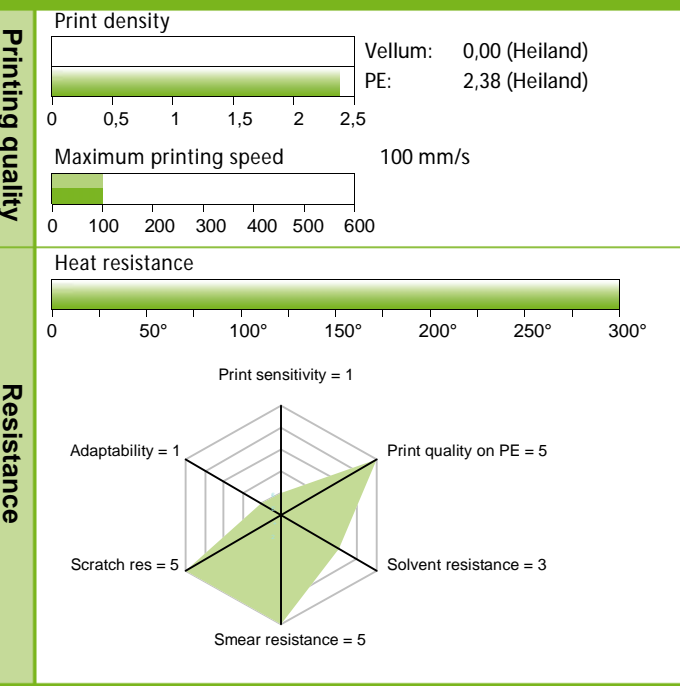

Ribbon specification

Quality level:	Resin	Flat-head
Basefilm:	PET 5,7 µm	
Ribbon:	7,0 µm	
Colour:	300 C	
Optical density ribbon:	1,50 (Heiland)	
Ink melting point:	130 °C	



Direct printing

Max

Max/Resin

Resin

CERTIFICATIONS:
The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

REACH:
All substances and preparations that are used for the production of this quality have been pre-registered.

SHELF-LIFE AND STORAGE CONDITIONS:
In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:
Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

