

Black is beautiful

Black Thermal transfer ribbons



T 848 Sw Resin

T 848 Sw

is an extremely wipe and scratch resistant resin quality. The print quality is heavily dependent on the used printer and label.



Flat-head

PROPERTIES

- Good resistance against smearing and scratching
- Excellent resistance against heat
- Print quality is depending on the printer and labels
- Print with good resistance and a long life duration (smearing, scratching, chemicals, environmental influences)

APPLICATIONS


- Perfectly suitable for printing on plastic cards but limited for labels
- Type plates

RECOMMENDED LABEL STOCK

- Particularly suitable for printing on plastic cards. Limited choice of labelling materials.



Near-edge

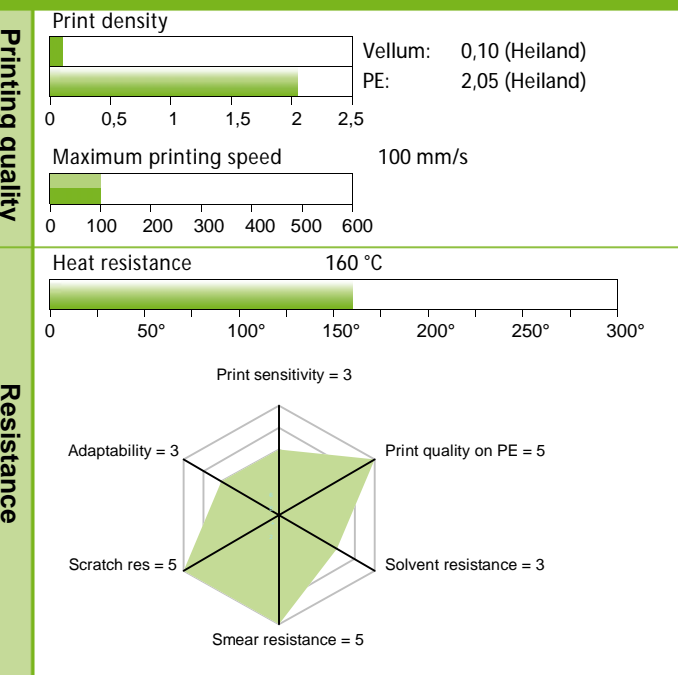

Ribbon specification

Quality level:	Resin	Flat-head
Basefilm:	PET 4,5 µm	
Ribbon:	6,5 µm	
Colour:	black	
Optical density ribbon:	1,40 (Heiland)	
Ink melting point:	90 °C	



Direct printing

Max

Max+

Max/Resin

Resin

Max

Max/Resin

Resin

Max

Max/Resin

Resin

CERTIFICATIONS:
 The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

REACH:
 All substances and preparations that are used for the production of this quality have been pre-registered.

SHELF-LIFE AND STORAGE CONDITIONS:
 In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:
 Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.