

Black is beautiful

# Black Thermal transfer ribbons



# eco NE Wax

## eco NE

is a dark near-edge wax grade quality for printing on coated paper requiring less mechanical resistance



Flat-head

Wax

Wax+

Wax/Resin

Resin

### PROPERTIES

- Dark black printing image and good contrast
- Suitable for high printing speeds

### APPLICATION

- Product labelling for shipping and logistic applications
- For labels with a normal durability

### RECOMMENDED LABEL STOCK

- Vellum, matt and gloss coated papers
- Cardboard materials




Near-edge

Wax

Wax/Resin

Resin

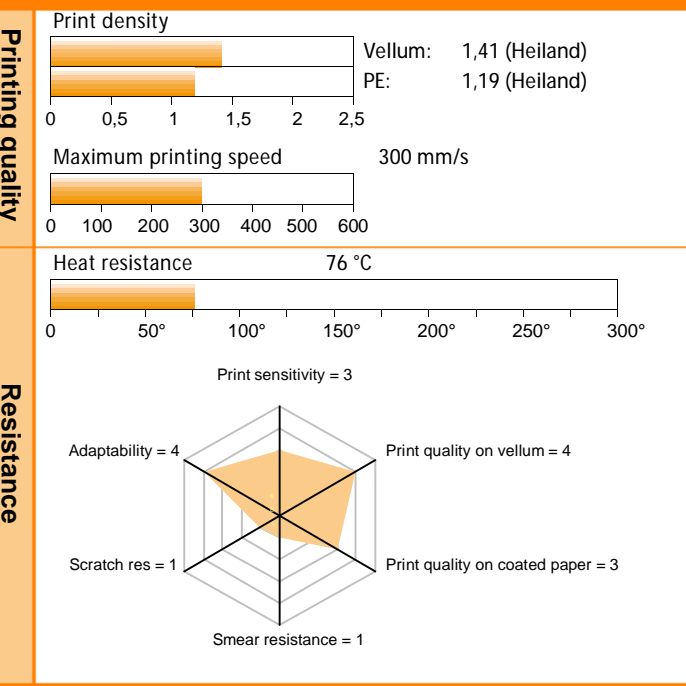

### Ribbon specification

Quality level:	Wax	Near-edge
Basefilm:	PET 4,5 µm	
Ribbon:	10,0 µ ±1,0 µm	
Colour:	Process Black	
Optical density ribbon:	2,41 (Heiland)	
Ink melting point:	61 °C	



Direct printing

Wax

Wax/Resin

Resin

**CERTIFICATIONS:**  
The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

**SHELF-LIFE AND STORAGE CONDITIONS:**  
In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly ( temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

**TESTING AND EVALUATION PROCEDURE:**  
Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

See reverse side for standard roll dimensions.

**REACH:**  
All substances and preparations that are used for the production of this quality have been pre-registered.

CALOR GmbH, 24.04.2017

# CALOR | RTT

## compact standard-articles

### Rolls on 1"-core

Length (m)	Coated side	Type	Width (mm)	Pc/box
<b>300</b>	<b>outside</b>	<b>3VA</b>	50	30
			90	20
			110	20
			135	10
			150	10
<b>300</b>	<b>outside</b>	<b>T87</b>	114	10
			160	10
			220	10
<b>450</b>	<b>inside</b>	<b>K01</b>	55	32
			110	16
<b>600</b>	<b>inside</b>	<b>NOV</b>	55	20
			85	10
			110	10
			130	5
			165	5
<b>600</b>	<b>inside</b>	<b>SMK</b>	55	20

Length (m)	Coated side	Type	Width (mm)	Pc/box
<b>600</b>	<b>outside</b>	<b>T57</b>	55	20
			70	10
			80	10
			85	10
			90	10
			102	10
			110	10
			135	5
<b>900</b>	<b>innen</b>	<b>SM9</b>	55	12
<b>1000</b>	<b>inside</b>	<b>AL1</b>	55	12
			110	6
<b>1000</b>	<b>outside</b>	<b>SOD</b>	55	12



Flat-head



Near-edge



Direct printin

Wax

Wax+

Wax/Resin

Resin

Wax

Wax/Resin

Resin

Wax

Wax/Resin

Resin

**Article on stock:**  
same day shipment for up to 20 boxes

**Standard articles:**  
shipment within 5 working days

Special widths on demand  
All data without guarantee.

**Order-Hotline: ++49 (0) 2401 9179-0**

We look forward  
to your call!

www.calor.de

**CALOR | RTT**