

Black is beautiful

Black Thermal transfer ribbons



T 151 Sw

Wax

T 151 Sw

is a very sensitive wax-quality for all Flat-head-printers: CAB, Datamax, Eltron, Intermec, Sato, Valentin, Zebra, aso.



Flat-head

PROPERTIES

- High pigment density and very black printing
- Good resolution, even for small characters and fine lines
- Very flexibel for different printing systems
- Very high sensitivity, which will save printing heads
- High flexibility, very good results on many print media , from Vellum to PE

APPLICATION


- Product identification, shipping and logistic labels
- suitable for printing with normal resistance
- Suitable for very high printing speeds

RECOMMENDED LABEL STOCK

- Vellum, matt- and gloss-coated papers
- Cardboard materials
- PE, PP, PET and othersynthetic films



Near-edge

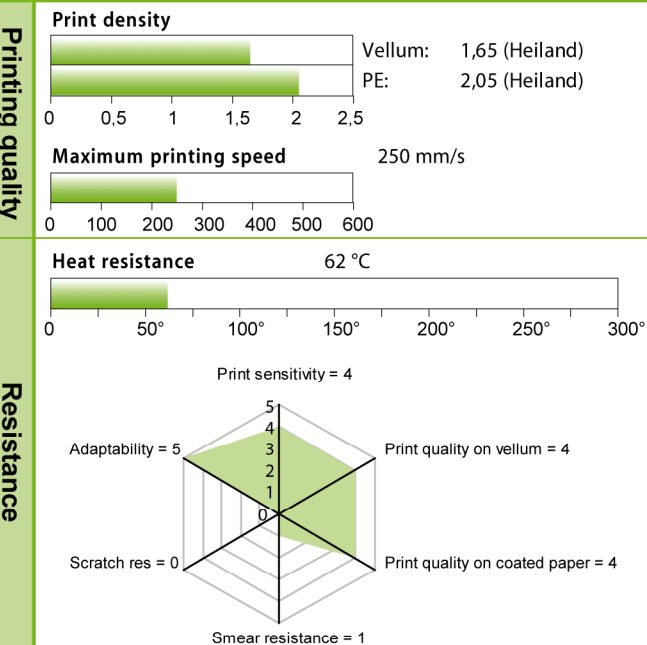

Ribbon specification

Quality level:	Wax	Flat-head
Basefilm:	PET 4,5 µm	
Ribbon:	7,5 µm ±0,3 µm	
Colour:	Process black	
Optical density ribbon:	1,60 (Heiland)	
Ink melting point:	65 °C	
Approvals:	Food industry (ISEGA)	



Direct printing

Wax

Wax+

Wax/Resin

Resin

Wax

Wax/Resin

Resin

Wax

Wax/Resin

Resin

CERTIFICATIONS:

The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicabel EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

SHelf-LIFE AND STORAGE CONDITIONS:

In principle thermal transfer ribbons have a long shelf live. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:

Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

REACH:

All substances and preparations that are used for the production of this quality have been pre-registered.

CALOR GmbH, 01.02.2016

CALOR | RTT

