



Colored Thermal transfer ribbons

T 201 Ga

is a grey wax quality for universal use on all flat-head printers, like CAB, Datamax, Eltron, Intermec, Sato, Valentin, Zebra, etc.



Flat-head

Wax

Wax+

Wax/Resin

Resin

PROPERTIES

- Excellent opacity
- High resolution even of small characters and fine lines
- Very sensitive, i. e. print-head friendly
- High flexibility, very good results on many different kinds of label stock, from vellum to gloss-coated cardboard materials

APPLICATIONS

- Highlighting of information in a colour other than black
- Product labelling and distinction with different colours
- Suitable for printing high-quality labels

RECOMMENDED LABEL STOCK

- Vellum, matt-, gloss- or cast-coated papers
- Cardboard materials




Near-edge

Wax

Wax/Resin

Resin

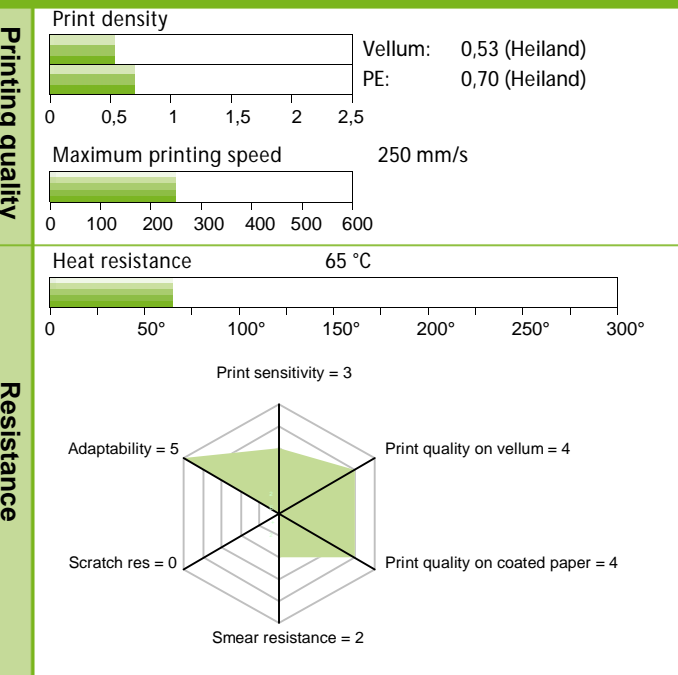

Ribbon specification

Quality level:	Wax	Flat-head
Basefilm:	PET 5,7 µm	
Ribbon:	10,5 µm ± 1,0 µm	
Colour:	Cool Grey 9C	
Optical density ribbon:	0,57 (Heiland)	
Ink melting point:	74 °C	



Direct printing

Wax

Wax/Resin

Resin

CERTIFICATIONS:
The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

REACH:
All substances and preparations that are used for the production of this quality have been pre-registered.

SHELF-LIFE AND STORAGE CONDITIONS:
In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 °C, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:
Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.