



T 561 BI Resin

Colored Thermal transfer ribbons

T 561 BI

is a resin quality with a very high mechanical and chemical resistance for all flat head printers, e.g.: CAB, Datamax, Eltron, Intermec, Sato, Valentin, Zebra, etc.



Flat-head

PROPERTIES

- Extremely resistant to chemical products (specially alcohol), scratching and smearing
- Very accurate printing, even for fine lines

APPLICATION


- Long life labelling for all applications i.e. car, electronic, chemical and medical industries
- For type plates
- For outdoor labelling

RECOMMENDED LABEL STOCK

- Synthetic films such as PE, PET, PP, PVC, acetate with a matt or glossy surface, corona treatment or suitable top coats
- For type plate substrates



Near-edge

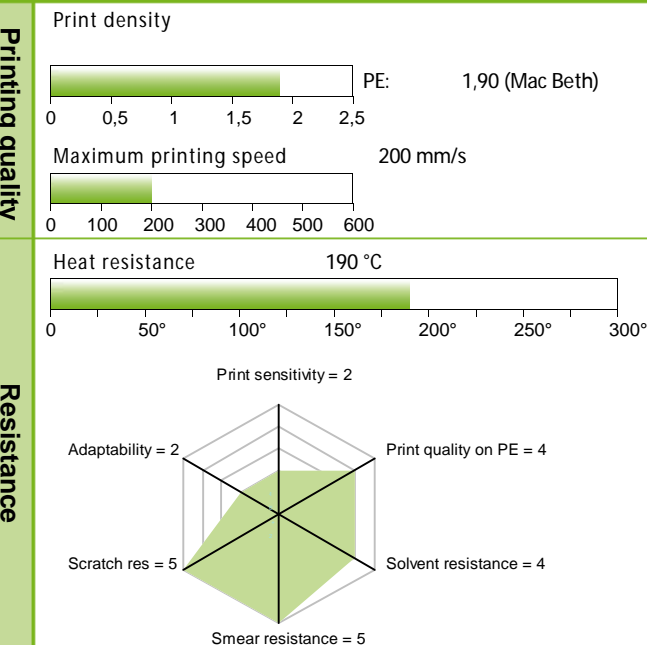

Ribbon specification

Quality level:	Resin	Flat-head
Basefilm:	PET 5,7 µm	
Ribbon:	8,5 µm ±1,0 µm	
Colour:	294 C	
Optical density ribbon:		
Ink melting point:	100 °C	



Direct printing

Wax

Wax+

Wax/Resin

Resin

Wax

Wax/Resin

Resin

Wax

Wax/Resin

Resin

CERTIFICATIONS:

The concentration of heavy metals in our thermal transfer ribbons is negligible and always lies below the value of the applicable EU norm for the use of dangerous substances, e.g. RoHS (EC Directive 2002/95) and WEEE (2002/96).

SHELF-LIFE AND STORAGE CONDITIONS:

In principle thermal transfer ribbons have a long shelf life. We guarantee that, when stored correctly (temperature: 5 - 35 ° centigrades, relative humidity: 30 - 80 %) our ribbons remain in perfect condition for use for 1 year.

TESTING AND EVALUATION PROCEDURE:

Our thermal transfer ribbons are tested according to CALOR/RTT testing procedures. We are happy to supply details upon request.

REACH:

All substances and preparations that are used for the production of this quality have been pre-registered.

CALOR | RTT

